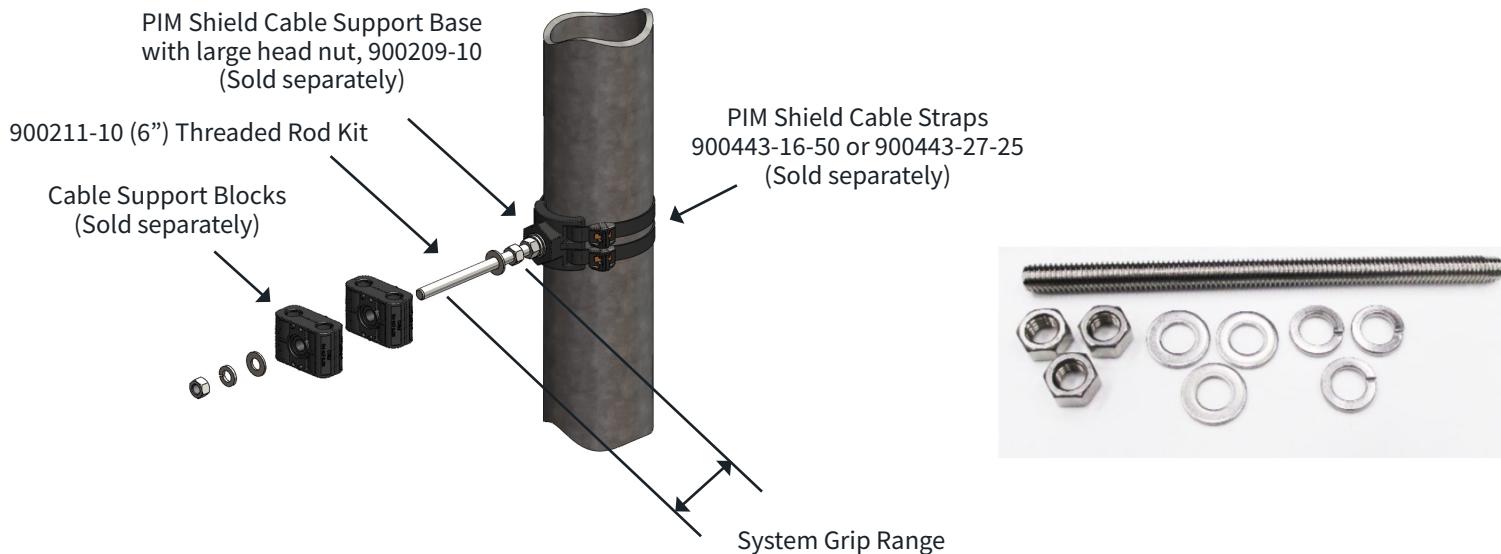


**900212-10**


## SPECIFICATIONS

<b>General</b>	PIM Shield Threaded Rod Kits are designed to be used with a PIM Shield Cable Support Base with Large Head Nut (PN 900209-10, sold separately) to provide a low passive intermodulation mounting system to secure RF cables in high risk PIM zones
<b>System Grip Range</b>	When used with a 900209-10 PIM Shield Cable Support Base with Large Head Nut the 900212-10 Threaded Rod Kit provides a usable grip range of 5.5-inches for securing plastic Cable Support Blocks
<b>System PIM Performance</b>	IM3 <-100 dBm when tested in accordance with IEC 62037-8, near field test, 2x 20W test tones, while subjected to dynamic stimulus. To achieve specified PIM performance, torque hardware to 10 FT-LB (ConcealFab tool 900053)
<b>Material</b>	Stainless Steel
<b>Operating Temperature</b>	-40°C to +70°C
<b>Case Dimensions</b>	12-inch x 9.5-inch x 7-inch
<b>Case Weight</b>	28.8 lb.
<b>Quantity per case</b>	10 kits of 10