



## SPECIFICATIONS

For patents see [www.cf-pat.com](http://www.cf-pat.com)


<b>General</b>	The PIM Shield Universal Base, Angle Adapter provides a low passive intermodulation method to secure a variety of cable sizes in high risk PIM zones. The Universal base can be used alone to secure bundles of cables or can be installed with an adapter to secure Snap-in hangers or Cable Support Blocks.
<b>Mounting</b>	Attach the PIM Shield Universal Base to existing structural angle members at the site (0.25" maximum flange thickness) using two PIM Shield Cable Straps (900443-16-50 or 900443-27-25) or equivalent.
<b>System PIM performance</b>	IM3 <-100 dBm when tested in accordance with IEC 62037-8, near field test, 2x 20W test tones, while subjected to dynamic stimulus
<b>Material</b>	UV stable, glass filled Nylon
<b>Plastic Base Color</b>	Black
<b>Operating temperature</b>	-40°C to +70°C
<b>Case dimensions</b>	15-inch x 11-inch x 8.0-inch
<b>Case weight</b>	10.4 lb.
<b>Qty per case</b>	10 kits of 10



Universal Base with cable cushion



Universal Base with Threaded Rod Adapter 900712-10

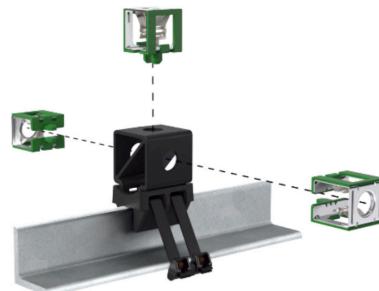

Universal Base with Snap-in Adapter 900713-10