


USE TO SECURE GALVANIZED THREADED ROD KITS TO PIM SHIELD RAIL.
USE 900360-10 TO SECURE STAINLESS STEEL THREADED RODS TO RAIL.

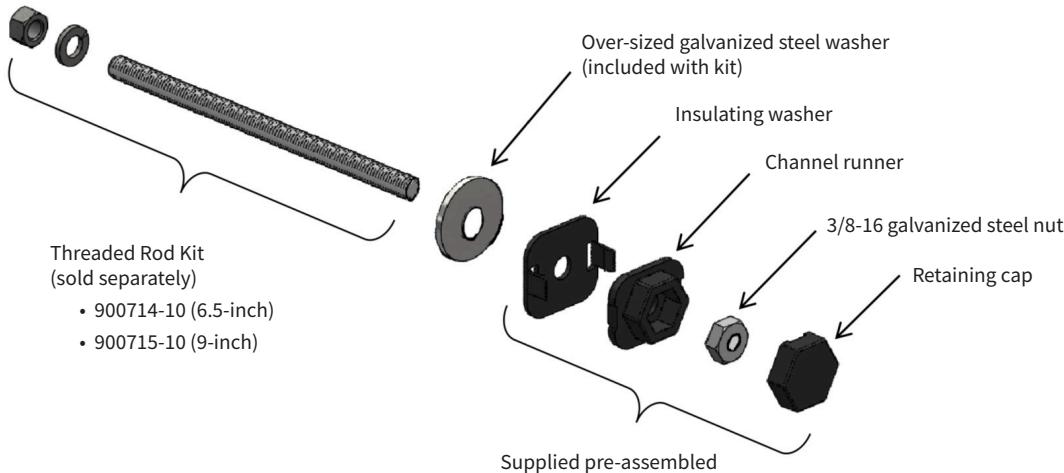

SPECIFICATIONS

For patents see www.cf-pat.com

General	PIM Shield Channel Runner Kit provides a low passive intermodulation method to secure galvanized Threaded Rod Kits (sold separately) to a PIM Shield Rail in the high-risk PIM zone. The channel runner assembly slides inside the rail extrusion and provides insulation between the aluminum rail and the galvanized mounting hardware.
Internal hardware	3/8-16 galvanized steel nut
System PIM performance (when tested at next higher assembly)	IM3 <-100 dBm when tested in accordance with IEC 62037-8, near field test, 2x 20W test tones, while subjected to dynamic stimulus. To achieve specified PIM performance, torque all 3/8-inch hardware to 10 FT-LB. (ConcealFab tool 900053)
Channel runner material	UV stable, glass filled Nylon
Operating temperature	-40°C to +70°C
Case dimensions	8.5-inch x 8.5-inch x 9-inch
Case weight	14.2 lbs.
Qty per case	10 kits of 10